


CONNECTS: CAP.IN

JUNCTION BOX

- The CAP.IN junction box integrates the connection of all DATALUX.IQ functionalities, such like DC, AC, dimming, audio, and TC/IP via an internal DIN terminal strip. This terminal strip is accessible via watertight glands. The CAP.IN junction box comes with pre-fitted cabling for installation of the external PSU driver.

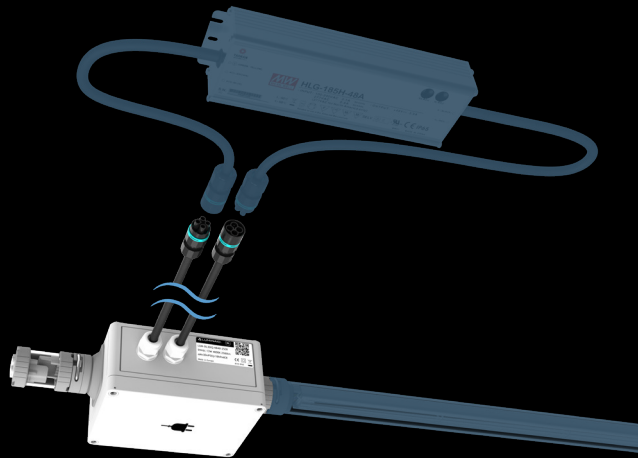


Features


article nr.: LUM-DL02IQ-INBX-000B

Dimensions box (LxWxH)	180 x 130 x 90 mm
IP class	IP65
IK class	IK07
Connectable signals	AC, DC, Emergency lighting, 0-10V light control, DALI, Ethernet, Audio
Length AC cable CAP.IN	±1000 mm
Length DC cable CAP.IN	±1000 mm
Material	PS, PA
Temperature range	-25°C ~ +35°C
Weight	1,2 kg

CAP.IN

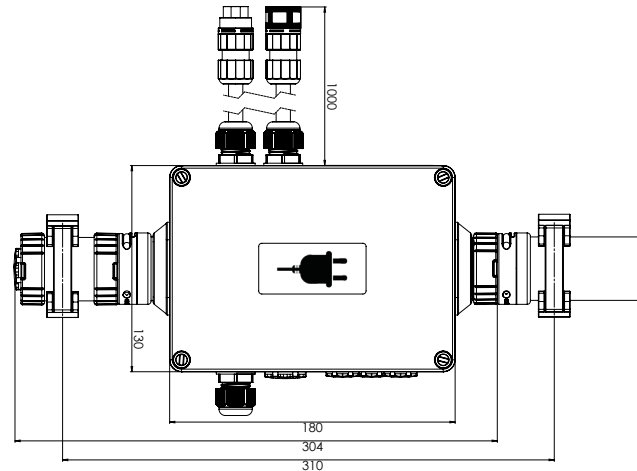


CAP.IN

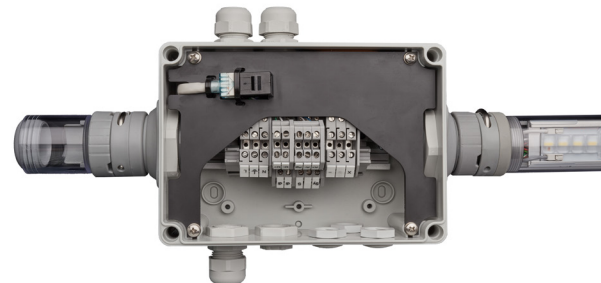

All products, product specifications and data are subject to change without notice to improve reliability, safety, function, design or otherwise.

Mounting possibilities

Mounting brackets

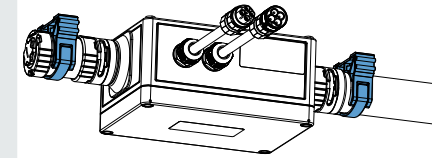

Screws

