

## IQ TRONICS: CAMERA 360

### 5MP 360° IP CAMERA

- The IQ Camera 360 Tronic is an integrated IP camera fitted with fisheye lens technology. It fits in between the lighting fixtures and can film all around.
- Besides the circular fisheye view there is also an onboard dewrap function that enables the possibility to send a panorama view or different parts of this view.
- The camera can easily be fitted within the lightline and can be interconnected via the CAP.IN at the beginning of the line to any TP/IP network.
- This Tronic can only be used on the Datalux.IQ system.




## Features

article nr.: LUM-DL02IQ-CMRA-360A

Input voltage	12 V <sub>DC</sub>
Input power	12 Watt
Type of camera	TCP/IP Camera
Suspension height	3-15 meters
Dimensions	180 x 182 x 150 mm
IP class	IP65 (box), IP66 (camera)
IK class	IK07 (box), IK10 (camera)
Weight	1,7 kg

## Video

Max. resolution	2592 x 1944 pixels
Image sensor	1/2.5" Progressive CMOS sensor
Lens type	Fisheye, f=1.57mm, F2.2
Pan/Tilt/Zoom	ePTZ: 10x digital zoom
Field of view	360° horizontally 180° vertically
Compression	H.264, MJPEG & MPEG-4
Max. framerate	10 fps bij 2592x1944 15 fps bij 1920x1920 (Hardware Dewrap) 15 fps bij 1920x1080 30 fps bij 1600x1200 (HI-FPS Mode) 30 fps bij 640x480
Motion detection	10 sections of video motion detection

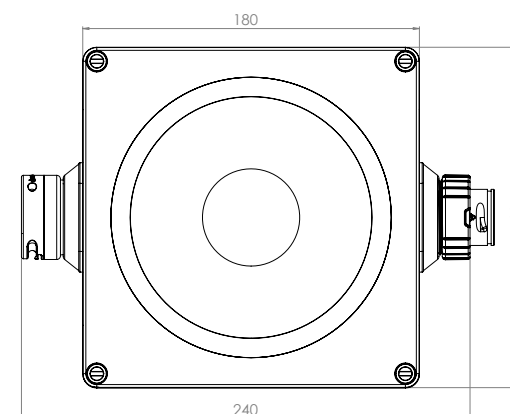

## IQ TRONIC: CAMERA 360

5MP 360° IP CAMERA



### Features


article nr.: LUM-DL02IQ-CMRA-360A

### Video image options

Fisheye 360° view



Panorama view

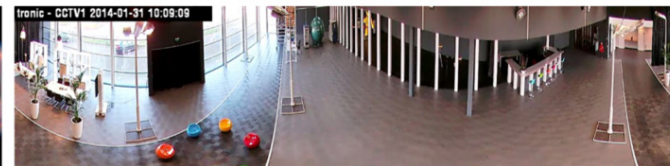

4 Channel PTZ



Split panorama view



All products, product specifications and data are subject to change without notice to improve reliability, safety, function, design or otherwise.