

IQ TRONICS: SPEAKER

ACTIVE SPEAKER

- Thanks to the use of balanced audio, there is no interference on the line with longer lengths. This technique is also applied at theaters, concerts and festivals.
- The speakers can be connected to a mixer or audio system via the CAP.IN at the beginning of the lightline.
- This Tronic can only be used in combination with the DATALUX.IQ light line system.




Features

article nr.: LUM-DL02IQ-SPKR-BA08

Input voltage	220 - 240 V _{AC} , 50/60 Hz
Input power	30 Watt
Type of signal	Balanced Audio
Dimensions	180 x 182 x 110 mm
Temperature range	-25 ~ +35°C
IP class	IP65
IK class	IK07
Weight	1,1 kg

Speaker

Power	40 Watt
Maximum power	60 Watt
Sound level	85 dB
Frequency range	70-16000 Hz

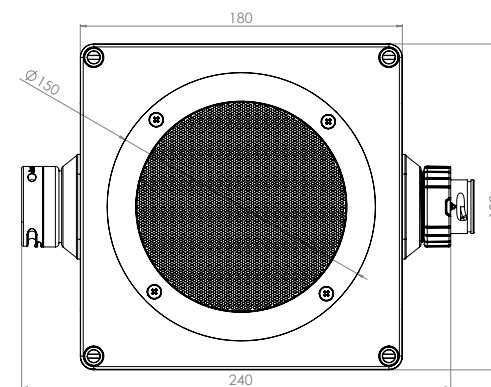

All products, product specifications and data are subject to change without notice to improve reliability, safety, function, design or otherwise.