
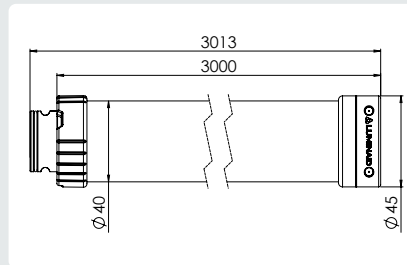
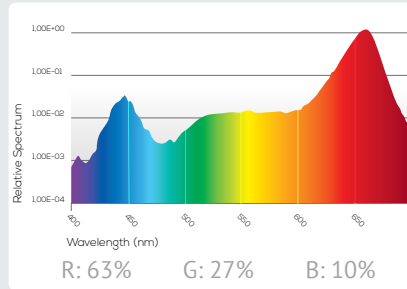


FLORALUX.fortis

3 METER FIXTURE

- Optimized for strawberry cultivation.
- From continued cultivation to an additional winter cultivation.
- plant development for both stretching and fruit development.
- Standard dimmable.
- Dust-proof, splash-proof and impact-resistant.
- High PPFD values for optimal growth stimulation.
- The lowest installed power per hectare.
- Limited radiant heat: only 2.5 °C increase on the foliage.
- Connectable light fixtures.
- Simple and quick assembly.

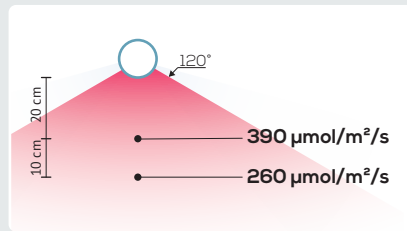

Connectable fixtures with integrated driver

Power	Artikel nr.:
150 Watt	LUM-FL30HP-12BB-D150
Maximum line lenght	16 st. / 48 m

Features

Dimming	Standard 0 - 10 V
Ambient temperature range	-20°C ~ +40°C
Maximum shadow width	32 mm

Mechanical

Fixture dimensions	Ø40 mm x 3013 mm (3000 mm pitch)
Weight	3,0 kg - 3,5 kg
IP-class	IP65
Housing material	Polycarbonate (UV stabilized)

Electrical

System input voltage	230 VAC
Fixture power	150 W



Beam profile FLORALUX.fortis - 120°

